



iei

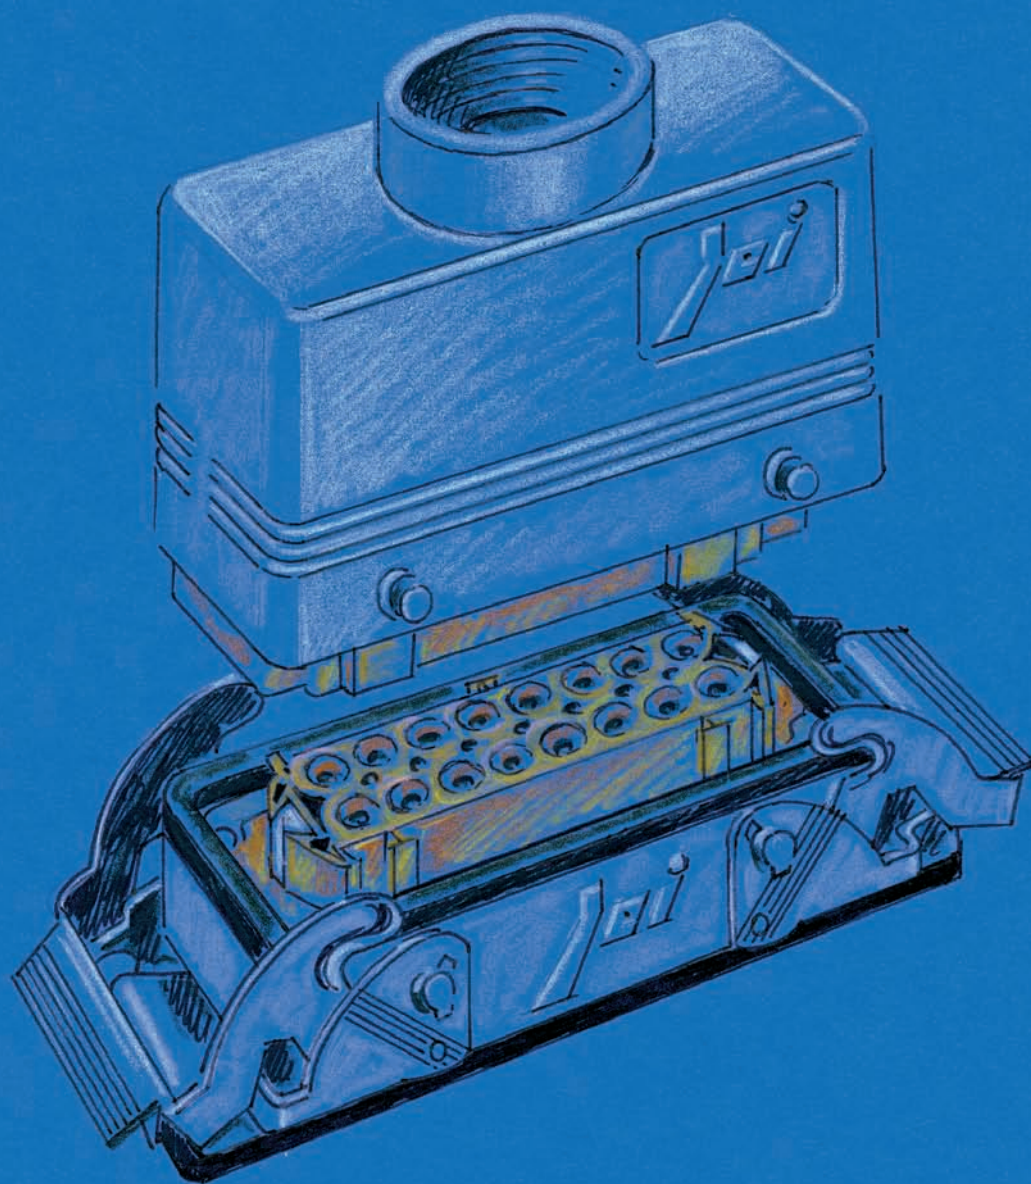

inserts:			page
CDD	24 poles + ⊕		59
CQE	10 poles + ⊕		80
CSH	6 poles + ⊕		88
CCE	6 poles + ⊕		94
CNE, CSE, JCNE, JCSE	6 poles + ⊕	95 and 106	
CSS	6 poles + ⊕		118
CT, CTE, CTSE *).....	6 poles + ⊕	126 and 130	
MIXO	2 modules	156÷195	

insert centre distance:
44 x 27 mm

bulkhead mounting housings
with single lever with galvanised steel lever



lever in
galvanized
steel

bulkhead mounting housings
with single lever with galvanised steel lever



lever in
galvanized
steel

description

part no.

part no.

with lever, size “44.27”

JCVI 06 L

with lever and plastic cover, size “44.27”


JCVI 06 LP

*) can be used only in bulkhead mounting housings

panel cut-out for bulkhead mounting housings in mm


dimensions in mm

dimensions in mm




type	A	B
JCVI 06	52	70

JCVI L

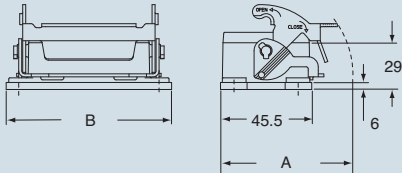

type	A	B
JCVI 06 L	66	82.5

JCVI LP

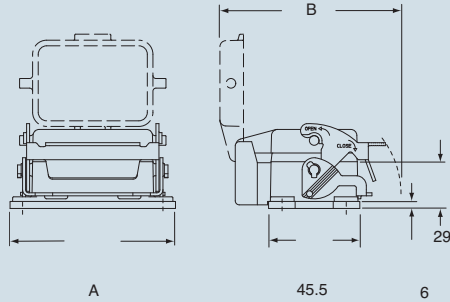

type	A	B
JCVI 06 LP	82.5	89

NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.



dimensions shown are not binding
and may be changed without notice



inserts:		page
CDD	24 poles + ⊕	59
CQE	10 poles + ⊕	80
CSH	6 poles + ⊕	88
CCE	6 poles + ⊕	94
CNE, CSE, JCNE, JCSE	6 poles + ⊕ 95 and 106	
CSS	6 poles + ⊕	118
MIXO	2 modules	156÷195

insert centre distance:
44 x 27 mm

surface mounting housings
with single lever with galvanised steel lever



lever in
galvanized
steel

surface mounting housings
with single lever with galvanised steel lever




lever in
galvanized
steel

description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with lever, size “44.27”	JCVP 06 L	16	JMVP 06 L20	20				
with lever and cover, size “44.27”					JCVP 06 LP	16	JMVP 06 LP20	20

NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

dimensions in mm


JCVP L - JMVP L

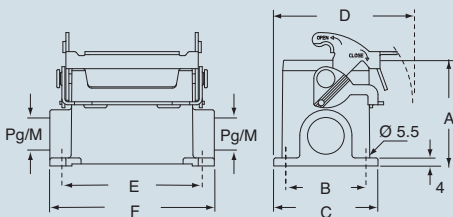

type	A	B	C	D	E	F
JCVP - JMVP	53	40	52	70	70	82

dimensions in mm

JCVP 06 LP - JMVP LP

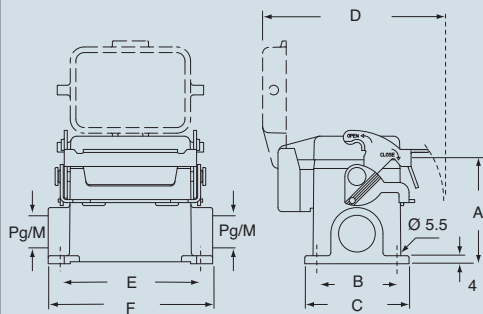

type	A	B	C	D	E	F
JCVP - JMVP	53	40	52	91	70	82



dimensions shown are not binding
and may be changed without notice

inserts:		page
CDD	42 poles + ⊕	61
CQE	18 poles + ⊕	81
CSH	10 poles + ⊕	89
CCE	10 poles + ⊕	96
CNE, CSE, JCNE, JCSE	10 poles + ⊕ 97 and 107	
CSS	10 poles + ⊕	119
CT, CTE, CTSE *)	10 poles + ⊕ 127 and 131	
CMSE	3+2 (aux) poles + ⊕	135
CMCE	3+2 (aux) poles + ⊕	134
CX	8/24 poles + ⊕	151
MIXO	3 modules	156+195

insert centre distance:
57 x 27 mm

bulkhead mounting housings
with single lever with galvanised steel lever




bulkhead mounting housings with 2 levers
and galvanised steel lever



description	part no.	part no.
with lever, size "57.27"	JCVI 10 L	
with lever and plastic cover, size "57.27"	JCVI 10 LP	
with levers, size "57.27"		JCVI 10


*) can be used only in bulkhead mounting housings
panel cut-out for bulkhead mounting housings in mm




type	A	B
JCVI 10	65	83

dimensions in mm

JCVI L

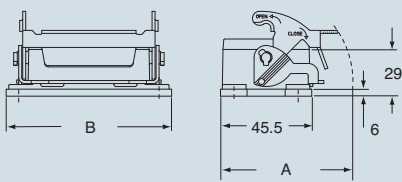


JCVI LP

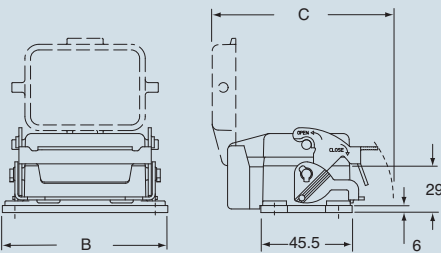

type	A	B	C
JCVI 10 L	70	95.5	-
JCVI 10 LP	-	95.5	94

dimensions in mm

JCVI

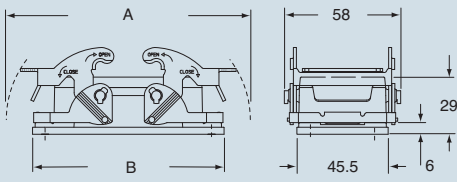

type	A	B
JCVI 10	122	95.5

NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.



dimensions shown are not binding
and may be changed without notice

inserts:		page
CDD	42 poles + ⊕	61
CQE	18 poles + ⊕	81
CSH	10 poles + ⊕	89
CCE	10 poles + ⊕	96
CNE, CSE, JCNE, JCSE	10 poles + ⊕	97 and 107
CSS	10 poles + ⊕	119
CMSE	3+2 (aux) poles + ⊕	135
CMCE	3+2 (aux) poles + ⊕	134
CX	8/24 poles + ⊕	135
MIXO	3 modules	156+195

insert centre distance:
57 x 27 mm

surface mounting housings with single lever with galvanised steel lever



lever in
galvanized
steel

bulkhead mounting housings with 2 levers and galvanised steel lever




lever in
galvanized
steel

description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with lever/s, size "57.27"	JCVP 10 L	16	JMVP 10 L20	20				
with levers, size "57.27"					JCVP 10	16	JMVP 10.20	20

dimensions in mm


JCVP L - JMVP L

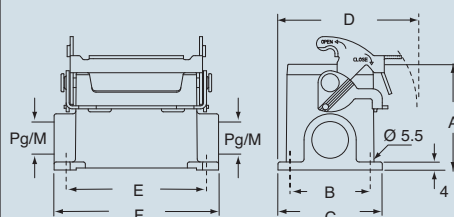

type	A	B	C	D	E	F
JCVP - JMVP	57	40	52	73	82	93.5

dimensions in mm

JCVP - JMVP

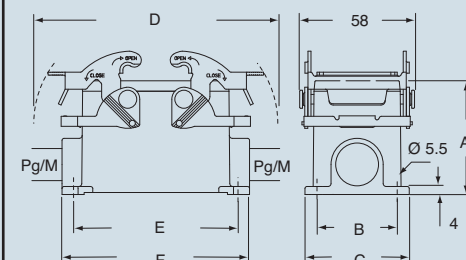

type	A	B	C	D	E	F
JCVP - JMVP	57	40	52	122	82	93.5



dimensions shown are not binding
and may be changed without notice

inserts:		page
CD	40 poles + ⊕	49
CT, CTS (10A)	40 poles + ⊕	56
CDD	72 poles + ⊕	62
CQE	32 poles + ⊕	82
CSH	16 poles + ⊕	90
CCE	16 poles + ⊕	98
CNE, CSE, JCNE, JCSE	16 poles + ⊕	99 and 108
CSS	16 poles + ⊕	120
CT, CTE, CTSE (16A) *)	16 poles + ⊕	128 and 132
CMSE	6+2 (aux) poles + ⊕	137
CMCE	6+2 (aux) poles + ⊕	136
CP	6 poles + ⊕	149
CX	6/36 and 12/2 poles + ⊕	152÷153
CX	4/0 and 4/2 poles + ⊕	154
MIXO	4 modules	156÷195

insert centre distance: 77.5 x 27 mm

bulkhead mounting housings with single lever with galvanised steel lever




bulkhead mounting housings with 2 levers and galvanised steel lever



description	part no.	part no.
with lever, size "77.27"	JCVI 16 L	
with lever and plastic cover, size "77.27"	JCVI 16 LP	
with levers, size "77.27"		JCVI 16

*) can be used only in bulkhead mounting housings

panel cut-out for bulkhead mounting housings in mm




type	A	B
JCVI 16	86	103


NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

dimensions in mm

JCVI L

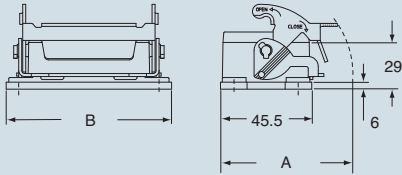


JCVI LP

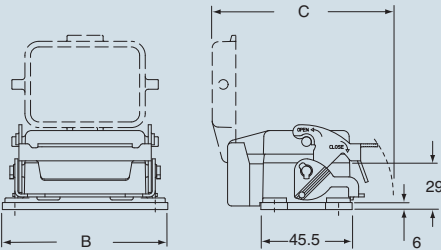

type	A	B	C
JCVI 16 L	70	115.5	-
JCVI 16 LP	-	115.5	94

dimensions in mm

JCVI

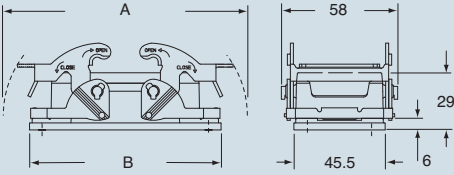

type	A	B
JCVI 16	142.5	115.5



dimensions shown are not binding and may be changed without notice

inserts:		page
CD	40 poles + ⊕	49
CDD	72 poles + ⊕	62
CQE	32 poles + ⊕	82
CSH	16 poles + ⊕	90
CCE	16 poles + ⊕	98
CNE, CSE, JCNE, JCSE	16 poles + ⊕	99 and 108
CSS	16 poles + ⊕	120
CMSE	6+2 (aux) poles + ⊕	1137
CMCE	6+2 (aux) poles + ⊕	136
CP	6 poles + ⊕	149
CX	6/36 and 12/2 poles + ⊕	152÷153
CX	4/0 and 4/2 poles + ⊕	154
MIXO	4 modules	156÷195

insert centre distance: **77.5 x 27 mm**

surface mounting housings with single lever with galvanised steel lever



lever in
galvanized
steel

surface mounting housing with 2 levers and galvanised steel lever




lever in
galvanized
steel

description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with lever, size "77.27"	JCVP 16 L	21	JMVP 16 L25	25				
with levers, size "77.27"					JCVP 16	21	JMVP 16.25	25

dimensions in mm


JCVP L - JMVP L

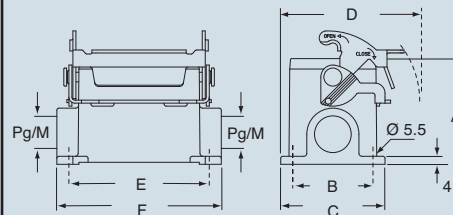

type	A	B	C	D	E	F
JCVP L - JMVP L	63	45	57	75.5	105	117

dimensions in mm

JCVP - JMVP

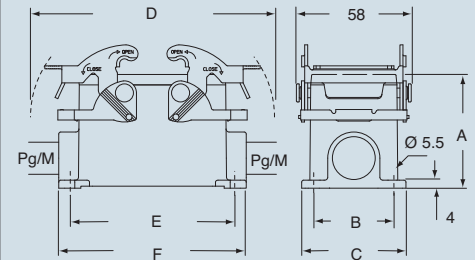

type	A	B	C	D	E	F
JCVP - JMVP	63	45	57	142.5	105	117



dimensions shown are not binding
and may be changed without notice

inserts:		page
CD	64 poles + ⊕	51
CT, CTS (10A)	64 poles + ⊕	57
CDD	108 poles + ⊕	64
CQE	46 poles + ⊕	83
CSH	24 poles + ⊕	91
CCE	24 poles + ⊕	100
CNE, CSE, JCNE, JCSE	24 poles + ⊕ 101 and 109	
CSS	24 poles + ⊕	121
CT, CTE, CTSE (16A) *)	24 poles + ⊕ 129 and 133	
CMSE	10+2 (aux) poles + ⊕	139
CMCE	10+2 (aux) poles + ⊕	138
CX	4/8 poles + ⊕	155
MIXO	6 modules	156÷195


insert centre distance:
104 x 27 mm

bulkhead mounting housings
with single lever with galvanised steel lever



lever in
galvanized
steel


bulkhead mounting housings
with 2 levers and galvanised steel lever



lever in
galvanized
steel

description	part no.	part no.
with lever, size “104.27”	JCVI 24 L	
with lever and plastic cover, size “104.27”	JCVI 24 LP	
with levers, size “104.27”		JCVI 24

*) can be used only in bulkhead mounting housings
panel cut-out for bulkhead mounting housings in mm




type	A	B
JCVI 24	112	130


NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

dimensions in mm

JCVI L

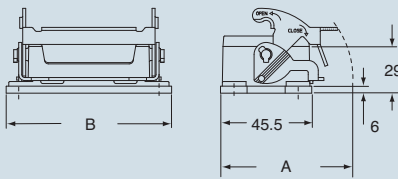


JCVI LP

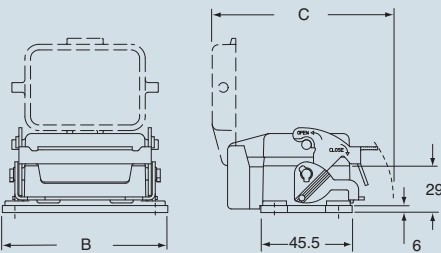

type	A	B	C
JCVI 24 L	70	142.5	-
JCVI 24 LP	-	142.5	94

dimensions in mm

JCVI

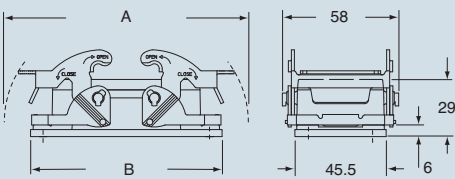

type	A	B
JCVI 24	169	142.5



dimensions shown are not binding
and may be changed without notice



inserts:		page
CD	64 poles + ⊕	51
CDD	108 poles + ⊕	64
CQE	46 poles + ⊕	83
CSH	24 poles + ⊕	91
CCE	24 poles + ⊕	100
CNE, CSE, JCNE, JCSE	24 poles + ⊕	101 and 109
CSS	24 poles + ⊕	121
CMSE	10+2 (aux) poles + ⊕	139
CMCE	10+2 (aux) poles + ⊕	138
CX	4/8 poles + ⊕	155
MIXO	6 modules	156+195

insert centre distance:
104 x 27 mm

surface mounting housings
with single lever with galvanised steel lever



lever in
galvanized
steel

bulkhead mounting housings
with 2 levers and galvanised steel lever




lever in
galvanized
steel

description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with lever, size “104.27”	JCVP 24 L	21	JMVP 24 L25	25				
with levers, size “104.27”					JCVP 24	21	JMVP 24.25	25

dimensions in mm


JCVP L

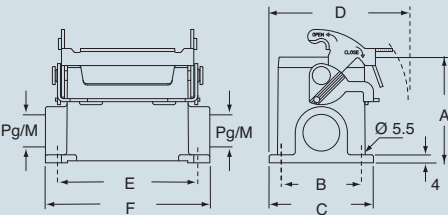

type	A	B	C	D	E	F
JCVP L - JMVP L	63	45	57	75.5	132	144

dimensions in mm

JCVP

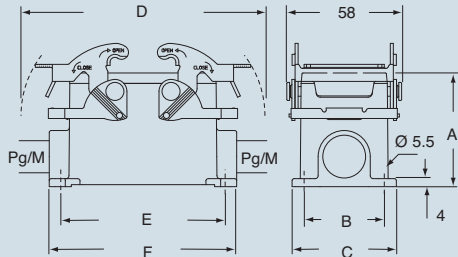

type	A	B	C	D	E	F
JCVP - JMVP	63	45	57	169	132	144



dimensions shown are not binding
and may be changed without notice